


TECHNICAL DATA SHEET (TDS)

ONGRONAT® CO 4070

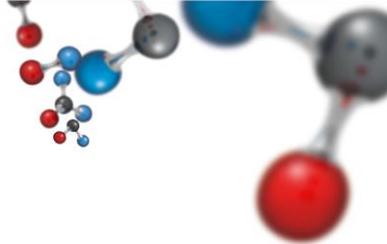

- **Product Description:** ONGRONAT® CO 4070 is a type of polymeric MDI with average functionality of 2.6 - 2.7
- **Appearance:** ONGRONAT® CO 4070 is a solvent free, dark-brown liquid of low viscosity at room temperature
- **Features & benefits of the end products produced using ONGRONAT® CO 4070:** Efficient thermal insulation, Flowability
- **Industry:** Construction
- **Applications:** Rigid insulating foams, semi rigid integral skin and structural foams

SPECIFICATIONS

Property	Value	Dimension	Test method
NCO	30.0 – 32.0	wt%	BorsodChem Method PAK 155
Viscosity [at 25 °C]	170 - 230	mPa.s	ASTM D4889

OTHER PROPERTIES*

Property	Value	Dimension
Density [at 25 °C]	1.23	g/cm ³
Flash point	>200	°C
Vapour pressure [at 25 °C]	<10 ⁻⁵	mbar

*Values given in the “other properties” section are only typical ones, therefore they are not to be considered as part of the specification.

PACKAGING, STORAGE & TRANSPORT

ONGRONAT® CO 4070 can be packaged and transported in road tankers, 1000 l containers (IBCs), 250 kg non-returnable metal drums, or in metal cans under nitrogen blanket. The loading temperature is 40 – 45 °C. Please note that based on the distance of the destination the delivery temperature may differ from the loading temperature, but still remains in the range of 20 – 45 °C delivering the product in bulk. In bulk, ONGRONAT® CO 4070 is shipped according to the above mentioned delivery temperature range in the lack of any special requirement.

It is recommended to store ONGRONAT® CO 4070 within the temperature range of 10 – 30 °C. Under these conditions the quality will be maintained for max. six (6) months. Storing the product in drums or IBCs care must be taken to avoid cold shocks or overheating. (For instance overheating may be caused by the exposure of the drums or IBCs to intensive sunlight.) The material must be kept dry at all times; therefore


it must be protected from water ingress and atmospheric moisture. In order to protect the material from atmospheric moisture a dry inert gas blanket (nitrogen) with a dew point of -40 °C must be applied into the containers (drums, IBCs or storage tanks). Dry air is not recommended for this purpose because it causes undesirable oxidation and due to this the colour of the product may become darker. It is not recommended to use carbon dioxide (CO₂) as an inert gas either, since it is soluble in isocyanates.

SAFETY PRECAUTIONS

All activities related to isocyanate handling are potential sources of danger; therefore special care must be taken when working with it. Handle the material with care. Avoid contact with water and moisture. Avoid contact with skin and eyes. Do not inhale the vapours of the product. Detailed safety information available in the specific Safety Data Sheet.

TECHNICAL DATA SHEET (TDS)

ONGRONAT® CO 4070

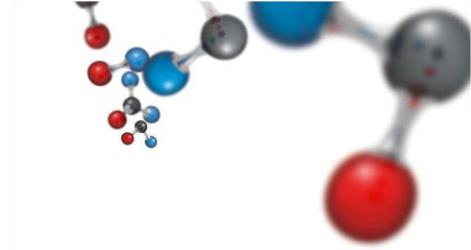

Version: English
Date: 17.09.2018
Technical Data Sheet (TDS)
ONGRONAT® CO 4070

www.borsodchem-group.com

This information is based on our most recent knowledge. However, the application and processing of the material after sale is beyond our control and we cannot assume responsibility for use of this material outside BorsodChem premises. The user is obliged to check the suitability of this material for the intended use and accepts sole responsibility for compliance with any legal requirements relating to its use. This document does not constitute a warranty or guarantee.

Manufactured by:

BorsodChem Zrt.
Bojai tér 1.,
H-3700, Kazincbarcika
Hungary
Phone: +36-48-511-211
Fax: +36-48-511-511

